



Espacenet


Bibliographic data: JP 2005225588 (A)

ROTARY VALVE

Publication date: 2005-08-25
Inventor(s): SHIGETOME KENICHI; YANAI JUNICHI +
Applicant(s): SANZO KANKYO ENGINEERING KK +
Classification:
- international: **B65G53/46; B65G65/48;** (IPC1-7): B65G53/46; B65G65/48
- European:
Application number: JP20040033737 20040210
Priority number(s): JP20040033737 20040210
Also published as: • JP 4494032 (B2)

Abstract of JP 2005225588 (A)

PROBLEM TO BE SOLVED: To provide a rotary valve capable of achieving little wear/replacement frequency, relatively high resistance to material/object inclusion and high efficiency by rotating a rotor smoothly while always keeping a housing inside airtight. ; **SOLUTION:** A chip plate 10 made of self-lubricant resin is sandwiched between a rotor plate 6 and a presser plate 9 so as to be movable in the radial direction alone. Moreover, by energization with a built-in spring 7, the chip plate 10 is pressed against a housing inner-periphery surface. ; **COPYRIGHT:** (C)2005,JPO&NCIP

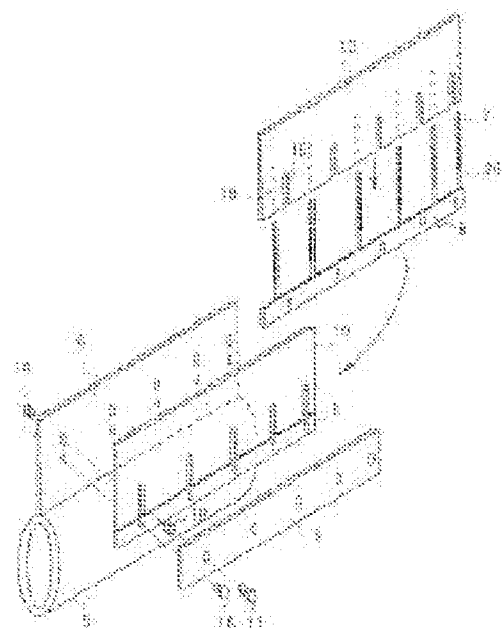

Last updated:
26.04.2011 Worldwide
Database 5.7.22; 93p